




## Aruba DELIMAR

Item number 43262, KMAT 61000411

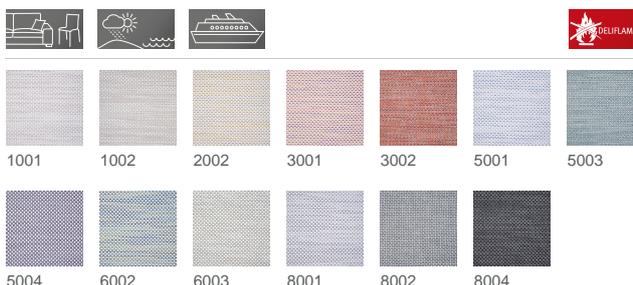

### Product description

DELIMAR fabrics have been specially developed for outdoor use. These upholstery fabrics are made from the innovative Polyolefinic FR fiber, which permanently combines many positive properties. Flame retardancy, high light fastness, chlorine and seawater resistance and weather resistance are the hallmarks of this special fiber. The fabrics are machine-washable at 40°C and quick-drying, so that mold and bacteria cannot form in the first place. DELIMAR fabrics are free of harmful substances, antistatic and water-repellent. Multi-colored and a coarse structure determine the fabric appearance of the small-patterned upholstery fabric Aruba. The high-quality, multi-colored twisted weft yarn creates a versatile multicolored effect. In some colorways, the color combination creates a particularly interesting braided look. The interweaving of different colored warp and weft yarns enables a variety of decorative color combinations that create beautiful accents in combination with plain surfaces and other colors. With 40,000 abrasion cycles, Aruba is ideal as an upholstery fabric for small and large seating furniture or as a cushion cover. DELIMAR fabrics should not be missing in hotels and on cruise ships around the world. With their memorable structures, they are an enrichment for the rooftop bar, the pool area, the outdoor lounge, the spa or the summer terrace. But they also create a special ambience indoors and offer great added value with their easy-care functions.

### Technical Details

<b>Fabric width</b>	approx. 135 cm
<b>Weight je m<sup>2</sup></b>	approx. 670 g/m <sup>2</sup>
<b>Composition</b>	100% Polyolefinic FR
<b>Flame retardancy</b>	IMO 2010 FTP Code Part 8, 1 / M, BS 5852 CRIB 5, DIN EN 1021-2, DIN EN 1021-1, CAL TB 117, NFPA 260 Flammability performance is dependant on the foam used.

<b>Light fastness</b>	note 6
<b>Wash fastness 40°C</b> <b>DIN EN ISO 105-C06</b>	note 4-5
<b>Wash fastness 60°C</b> <b>DIN EN ISO 6330 DIN EN ISO 5077</b>	note 4-5
<b>Dimensional change Washing 40°C</b> <b>DIN EN ISO 6330 DIN EN ISO 5077</b>	warp approx. +/-1%, weft approx. +/-1%
<b>Dimensional change Washing 60°C</b> <b>DIN EN ISO 6330 DIN EN ISO 5077</b>	warp approx. +/-3%, weft approx. +/-3%
<b>Seawater safety</b>	4-5
<b>DIN EN ISO 105-B02</b>	
<b>Chlorine water safety</b>	4-5
<b>Rubbing fastness</b> <b>DIN EN ISO 105-X12</b>	dry: note 4-5, wet: note 4-5
<b>Abrasion to Martindale</b> <b>DIN EN ISO 12947-2</b> <b>DIN EN 14465-2006</b>	approx. 40000 rubs
<b>Pilling</b> <b>DIN EN ISO 12945-2</b>	Note 5 at 2000 rpm
<b>Care labelling</b>	
<b>Additional information</b>	Bei dieser Ware handelt es sich um ein hochwertiges Gewebe aus Polyolefin (Polypropylen). Unter künstlichem Licht neigen helle Farben zu leichten Verfärbungen. Dieses Phänomen ist technisch bedingt. Unter Sonneneinstrahlung verliert sich dieser Effekt.
<b>State</b>	2024-04-19