


Colin DIMOUT

Item number 34956, KMAT 61000116

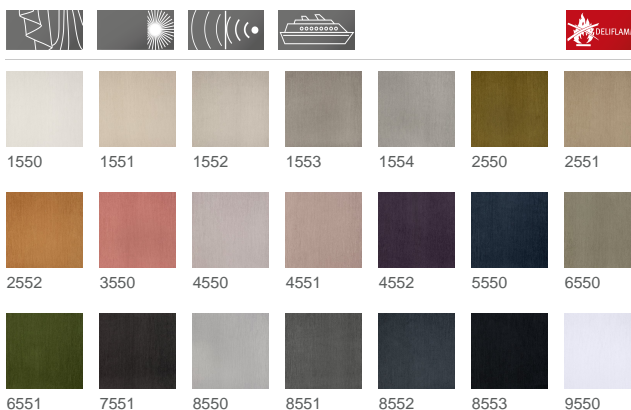

Product description

Dimout curtains are blackout fabrics that reduce the usual 40% light transmission to just 1%. The degree of darkening is 99%, depending on the color. Dimout fabrics are a double satin with a black weft. These two components create a very dense, softly flowing fabric that allows hardly any light to shine through and has excellent acoustic properties. The Colin blackout fabric perfectly complements the colors of the boho style. But it's not just the colors that match this interior design trend, but also the particularly soft chenille surface. Colin is a room-high plain dimout. The chenille yarn creates a vertical pattern of light, lively, matt shades. The reverse side is color-coordinated with the front in the usual dimout quality

Dimouts darken bedrooms and hotel rooms and enable a restful night's sleep. In a pleasant way, colors and design create a feel-good atmosphere. In meeting rooms or classrooms, their function can create perfect conditions for screen presentations. But dimouts are also excellent curtains in retirement homes, hospitals or daycare center bedrooms. Dimouts can be used wherever there is a lack of classic external shading.

Technical Details

Fabric width	approx. 295 cm
Weight je m²	approx. 360 g/m ²
Composition	100% Polyester FR
Flame retardancy	IMO 2010 FTP Code Part 7, M 1, C 1, BS 5867 Typ B, EN 13773, DIN 4102 / B1, DIN 4102 / B2, NFPA 701 Flammability performance is dependant on the foam used.
Light fastness	note 6
Wash fastness 40°C	note 4-5

DIN EN ISO 105-C06

Wash fastness 60°C note 4-5
DIN EN ISO 6330 DIN EN ISO 5077

Wash fastness 72°C note 4-5
DIN EN ISO 6330 DIN EN ISO 5077

Dimensional change Washing 40°C warp approx. +/-1%, weft approx. +/-1%
DIN EN ISO 6330 DIN EN ISO 5077

Dimensional change Washing 60°C warp approx. +/-2%, weft approx. +/-1%
DIN EN ISO 6330 DIN EN ISO 5077

Dimensional change Washing 72°C
DIN EN ISO 6330 DIN EN ISO 5077

Rubbing fastness dry: note 4-5, wet: note 4-5
DIN EN ISO 105-X12

Measured sound absorption coefficient 0.85
DIN EN ISO 354/DIN EN ISO 11654

Sound absorption Class B

Care labelling



State 2024-04-20