




## Mikado DIMOUT

Item number 34832, KMAT 61000109

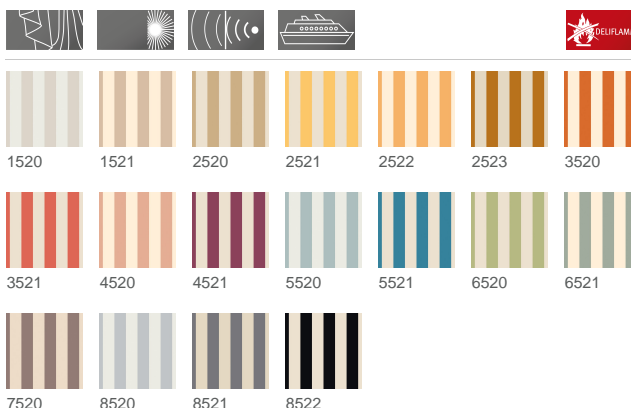

### Product description


Dimout curtains are blackout fabrics that reduce the usual 40% light transmission to just 1%. The degree of darkening is 99%, depending on the color. Dimout fabrics are a double satin with a black weft. These two components ensure a very dense, softly flowing fabric that hardly lets any light through and has excellent acoustic properties.

In this print series, patterned designs are printed on our classic Dimout blackout fabric. The designs range from floral motifs to universal stripes. Printing on 300 cm wide fabric enables seamless processing. The font for all motifs is a neutral pale beige. The wide, vertical block stripe Mikado is a design classic.

### Technical Details



<b>Fabric width</b>	approx. 300 cm
<b>Weight je m<sup>2</sup></b>	approx. 260 g/m <sup>2</sup>
<b>Rapport Width</b>	12
<b>Composition</b>	100% Polyester FR
<b>Flame retardancy</b>	IMO 2010 FTP Code Part 7, M 1, C 1, BS 5867 Typ B, EN 13773, DIN 4102 / B1, DIN 4102 / B2 Flammability performance is dependant on the foam used.
<b>Light fastness</b>	note 5

<b>Wash fastness 40°C</b> DIN EN ISO 105-C06	note 4-5
<b>Wash fastness 60°C</b> DIN EN ISO 6330 DIN EN ISO 5077	note 4-5
<b>Wash fastness 72°C</b> DIN EN ISO 6330 DIN EN ISO 5077	note 4-5
<b>Dimensional change Washing 40°C</b> DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1%
<b>Dimensional change Washing 60°C</b> DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1%
<b>Dimensional change Washing 72°C</b> DIN EN ISO 6330 DIN EN ISO 5077	
<b>Rubbing fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Measured sound absorption coefficient</b> DIN EN ISO 354/DIN EN ISO 11654	0.65
<b>Sound absorption</b>	Class C
<b>Care labelling</b>	
<b>State</b>	2024-05-26