


Orbit DELIBLACK

Item number 48947, KMAT 61000465

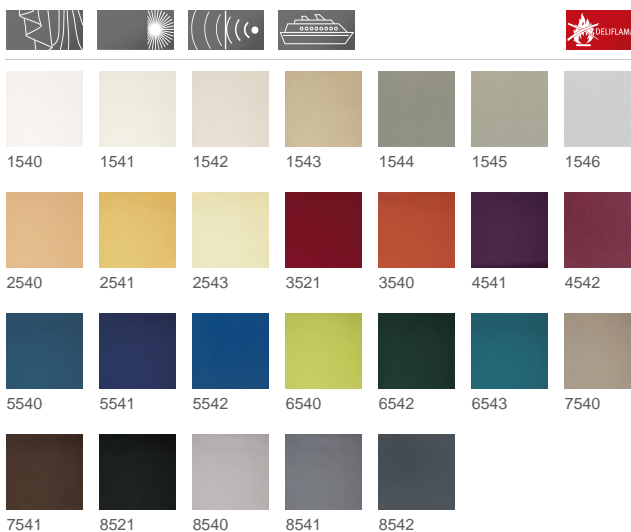

Product description

Blackouts have a blackout level of 100%. Thanks to a soft acrylic coating on the back, light rays cannot penetrate the material. The coating is particularly soft, which is why the fabric retains its flowing drape. All items in the Blackout range also have special stain protection and are naturally flame-retardant. Orbit has a subtle sheen and is available in 26 popular colors. The reverse side of Orbit has a white coating.

Technical Details

Fabric width	approx. 280 cm
Weight je m²	approx. 270 g/m ²
Composition	100% Polyester Acrylat Softbeschichtung
Flame retardancy	IMO 2010 FTP Code Part 7, C 1, BS 5867 Typ B, EN 13773, DIN 4102 / B1, DIN 4102 / B2, NFPA 701 Flammability performance is dependant on the foam used.
Light fastness	note 4-5
Light & solar properties	{"color": "1541", "total_energy_permeability_degree": 0.36, "reduce_factor": 0.51}
Wash fastness 40°C DIN EN ISO 105-C06	note 4-5
Dimensional change Washing 30°C	warp approx. +/-1%, weft approx. +/-1%
Rubbing fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5

Measured sound absorption coefficient 0.4
DIN EN ISO 354/DIN EN ISO 11654

Sound absorption Class D

Care labelling



Additional information

Nur die unbeschichtete Seite bügeln!

State

2024-04-24