




Scott DIMOUT

Item number 37510, KMAT 61000180

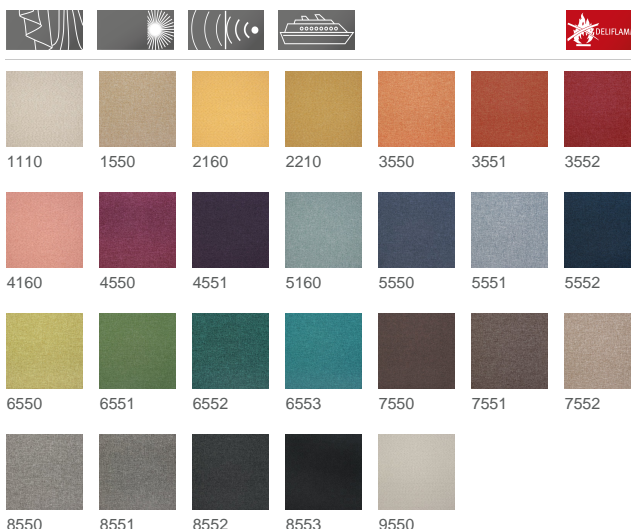


Product description

Dimout curtains are blackout fabrics that are able to reduce the usual 40% light transmission to just 1%. The degree of darkening is 99%, depending on the color. Dimout fabrics are a double satin with a black weft. These two components create a very dense, softly flowing fabric that hardly lets any light through and has excellent acoustic properties. Characteristic of Scott DIMOUT is its matt surface with a linen texture. The well-balanced melanges come into their own in natural and gray shades. Clear accent colors complete the color palette.


Dimouts such as Scott darken bedrooms and hotel rooms and enable a peaceful night's sleep. In a pleasant way, colors and design create a feel-good atmosphere. In meeting rooms or classrooms, their function can create perfect conditions for screen presentations. But dimouts are also excellent curtains in retirement homes, hospitals or daycare center bedrooms. Wherever classic external shading is lacking, the dimout comes into its own.

Scott DIMOUT is also available with antibacterial and air-purifying properties on request.

Technical Details



Fabric width	approx. 148 cm
Weight je m²	approx. 283 g/m ²
Composition	100% Polyester FR
Flame retardancy	IMO 2010 FTP Code Part 7, M 1, C 1, BS 5867 Typ B, EN 13773, DIN 4102 / B1, DIN 4102 / B2 Flammability performance is dependant on the foam used.

Light fastness	note 4
Wash fastness 40°C DIN EN ISO 105-C06	note 4-5
Wash fastness 60°C DIN EN ISO 6330 DIN EN ISO 5077	note 4-5
Wash fastness 72°C DIN EN ISO 6330 DIN EN ISO 5077	note 4
Dimensional change Washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1%
Dimensional change Washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-2%
Dimensional change Washing 72°C DIN EN ISO 6330 DIN EN ISO 5077	
Rubbing fastness DIN EN ISO 105-X12	dry: note 3-4, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.8
Sound absorption	Class B
Care labelling	
State	2024-04-27