




Timor DELIMAR

Item number 37000, KMAT 61000165

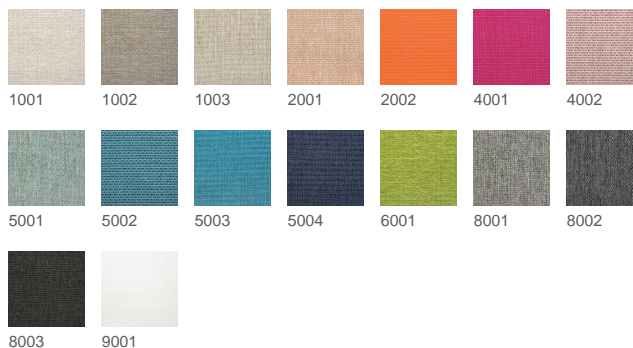

Product description

DELIMAR fabrics have been specially developed for outdoor use. This upholstery fabric is made from the innovative Polyolefinic FR fiber, which permanently combines many positive properties. Flame retardancy, high light fastness, chlorine and seawater resistance and weather resistance are the hallmarks of this special fiber. The designs are machine-washable at 40°C and quick-drying, so that mold and bacteria cannot form in the first place. DELIMAR fabrics are free of harmful substances, antistatic and water-repellent. Timor is a wonderfully textured faux plain that can be combined with all designs in the Latitude collection. With 60,000 abrasion cycles, it is very hard-wearing and durable. DELIMAR fabrics should not be missing in hotels and on cruise ships around the world. With their memorable structures, they are an enrichment for the rooftop bar, the pool area, the outdoor lounge, the spa or the summer terrace. But they also create a special ambience indoors and offer great added value with their easy-care functions.

Technical Details



| | |
|---------------------------------|---|
| Fabric width | approx. 140 cm |
| Weight per m² | approx. 470 g/m ² |
| Composition | 100% Polyolefinic FR |
| Flame retardancy | IMO 2010 FTP Code Part 8, 1 / M, BS 5852 CRIB 5, DIN EN 1021-2, DIN EN 1021-1, CAL TB 117, NFPA 260 |
| Light fastness | note 6 |

| | |
|---|--|
| Wash fastness 40°C DIN EN ISO 105-C06 | note 4-5 |
| Wash fastness 60°C DIN EN ISO 6330 DIN EN ISO 5077 | note 5 |
| Dimensional change Washing 40°C DIN EN ISO 6330 DIN EN ISO 5077 | warp approx. +/-1%, weft approx. +/-1% |
| Dimensional change Washing 60°C DIN EN ISO 6330 DIN EN ISO 5077 | warp approx. +/-3%, weft approx. +/-1% |
| Seawater safety DIN EN ISO 105-B02 | 4-5 |
| Chlorine water safety | 4-5 |
| Rubbing fastness DIN EN ISO 105-X12 | dry: note 4-5, wet: note 4-5 |
| Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006 | approx. 60000 rubs |
| Pilling DIN EN ISO 12945-2 | Note 5 at 2000 rubs |
| Care labelling | |
| Minimum quantities special colours m | 100 |
| Additional information | |
| State | 2026-03-07 |